


AOM681 to AOM713WP Swap out instructions

Remove the **AOM681** monitor panel, Intermediate harness, junction box and power harness from the existing system. The main camera cable will remain.



Install the **AOM713WP** monitor panel, Intermediate harness, junction box and wiring harness in place of the old system. Your camera cable will connect into the **TO CAMERA** inputs.

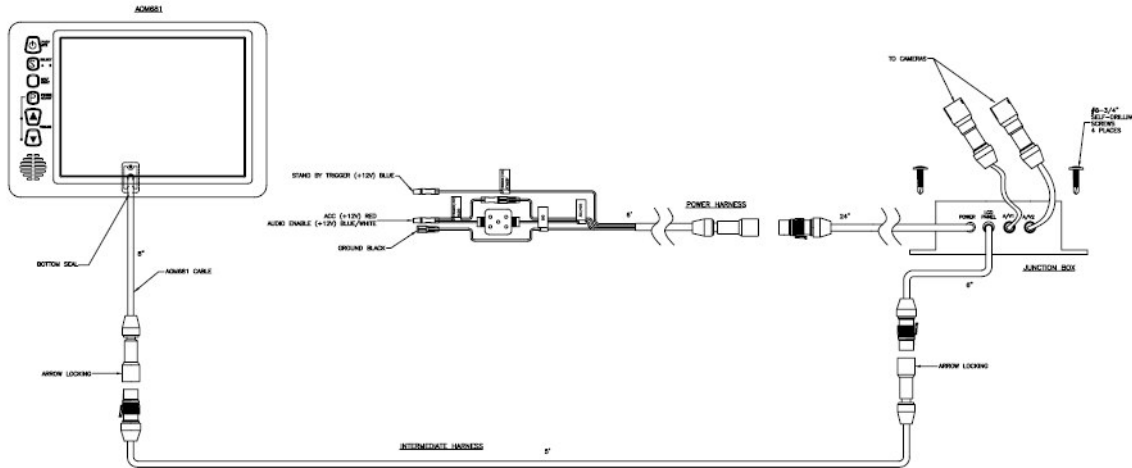